


PYLE

PyleUSA.com

PLMRMP4A

4 CHANNEL WATERPROOF MP3/Ipod
MARINE POWER AMPLIFIER

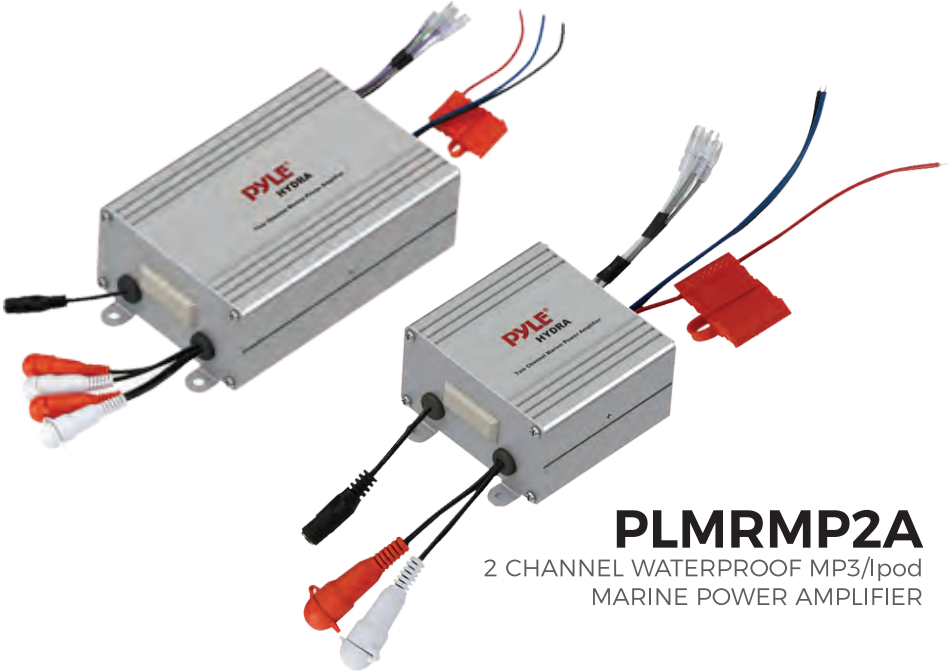

PLMRMP2A

2 CHANNEL WATERPROOF MP3/Ipod
MARINE POWER AMPLIFIER

USER'S MANUAL

Enjoy convenient music streaming from a universal mount audio system with the Pyle Compact Marine Amplifier Kit. It's compact, waterproof design allows for flexible mounting possibilities, and makes it simple to expand the audio system capabilities for vehicle.

PLMRMP2A

FEATURES:

- 2 x 150 Watts RMS at 4 ohm
- 2 x 300 Watts MAX at 4 ohm
- 2 x 300 Watts RMS at 2 ohm
- Anti-Thump Turn- On
- Soft Turn On / Off
- Adjustable High / Low Level Inputs
- RCA Line Input
- Power Protection Circuitry
- Volume Gain Remote Control
- T.H.D S/N Ratio : > 95 dB
- Channel Separation : > 65 dB
- Frequency Response : 10 – 40K Hz
- Fuse : 10 A
- Dimensions : 4.21"(L) x 3.50"(W) x 2.05"(H)

ACCESSORIES:

- iPod / MP3 / Waterproof 3.5mm Stereo to RCA Adaptor
- Remote Control for Volume Gain
- Sold as : Unit

PLMRMP4A

FEATURES:

- 4 x 150 Watts RMS at 4 ohm
- 4 x 300 Watts MAX at 4 ohm
- 4 x 300 Watts RMS at 2 ohm
- Anti-Thump Turn- On
- Soft Turn On / Off
- Adjustable High / Low Level Inputs
- RCA Line Input
- Power Protection Circuitry
- Volume Gain Remote Control
- T.H.D S/N Ratio : > 95 dB
- Channel Separation : > 65 dB
- Frequency Response : 10 – 40K Hz
- Fuse : 10 A
- Dimensions : 6.18"(L) x 3.50"(W) x 2.05"(H)

ACCESSORIES:

- iPod / MP3 / Waterproof 3.5mm Stereo to RCA Adaptor
- Remote Control for Volume Gain
- Sold as : Unit

WHAT IS INCLUDED?

When first unpacking your new amplified marine speaker system, Please check first that the package contains all of the items below. If something is missing, contact the store where you purchased the product.

PLMRMP2A

One Piece 2 Channel Waterproof Marine Power Amplifier
One Piece iPod / MP3 Waterproof 3.5mm Stereo to RCA Adaptor
One Piece Remote Control for Volume Gain

PLMRMP4A

One Piece 4 Channel Waterproof Marine Power Amplifier
One Piece iPod / MP3 Waterproof 3.5mm Stereo to RCA Adaptor
One Piece Remote Control for Volume Gain

Installation Precautions

Before you drill or cut any holes, investigate your vessel's layout very carefully. Take special care when you work near the gas tank, fuel lines, hydraulic lines and electrical wiring.

Never operate the amplifier when it is unmounted. Attach all audio system components securely within the amplifier to prevent damage, especially in an accident.

Do not mount this amplifier so that wire connections are unprotected. in a pinched condition, in contact with any metal surfaces in your marine vessel, or likely to be damaged by nearby objects.

Before making or breaking power connections in your system, disconnect the marine vessel battery. Confirm that your hear unit or other equipment is turned off while connecting the input jacks and speaker terminals.

If you need to replace the power fuse, replace it only with a fuse identical to that supplied with the amplifier, Using a fuse of a different type or rating may result in damage to your audio system or your amplifier which is not covered by the manufacturer's warranty.


Don't misuse the level control!

Do not mistake the input level control for a volume control! It is designed ONLY to match the output level of your audio source to the input level of your amplifier.

Do not adjust this input level of maximum unless your input level requires it.

Ignoring these instructions will result in an input overload to the amplifier, and excessive audio distortion. It can also cause the protection circuit to engage.

Controls, Input and Output Cables:

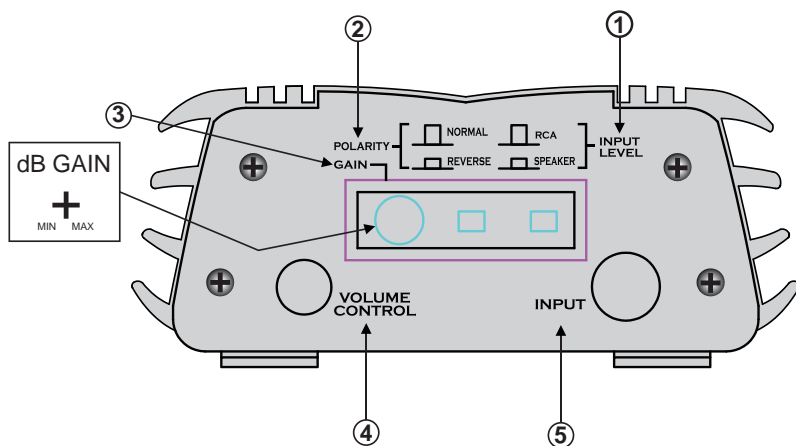


The switches and gain settings are located behind a watertight plug, which also lights up when the amplifier is on. Be sure to replace the plug when finished with adjustments

1. The **INPUT LEVEL** switch selects the input sensitivity of the amplifier. If you are connecting to a LINE level source (typically any RCA type connection) then the switch should be in the LINE (out) position. When connecting to loudspeaker outputs or headphone or high level sources then set the switch to the SPEAKER (in) position.
2. The **POLARITY** switch allows the user to optimize bass performance in the case that there are more than 1 set of loudspeakers producing bass in the system. Play some music with strong bass content and listen with the switch alternately in the **NORMAL** and **REVERSE** position until it can be determined which setting results in more pleasing bass response. If in doubt, or if any interaction with other speakers is unlikely, then leave the switch in the **NORMAL** position.

3. The **GAIN** control adjusts the overall level of the amplifier. When using the amplifier without volume control the level should be set to achieve a balance with other loudspeakers in the system. As a rule, keep the gain setting as low as possible while still insuring that the system will reach full output power. When using the system with external volume control, set the external Volume Control to **FULL** (clockwise) and adjust the gain on the amplifier until full output power is reached. Full output power level can be determined by turning the gain control clockwise until the apparent loudness does not appear to increase any more. Leave the control at the setting where this begins to become apparent.
4. **VOLUME CONTROL** Plug for the waterproof remote volume control. When installed, this control will turn off the PLMRMP3A Amp when turned all the way down.
5. **INPUT** Stereo **RCA** audio input for connecting other audio devices

Power and Speaker Wiring

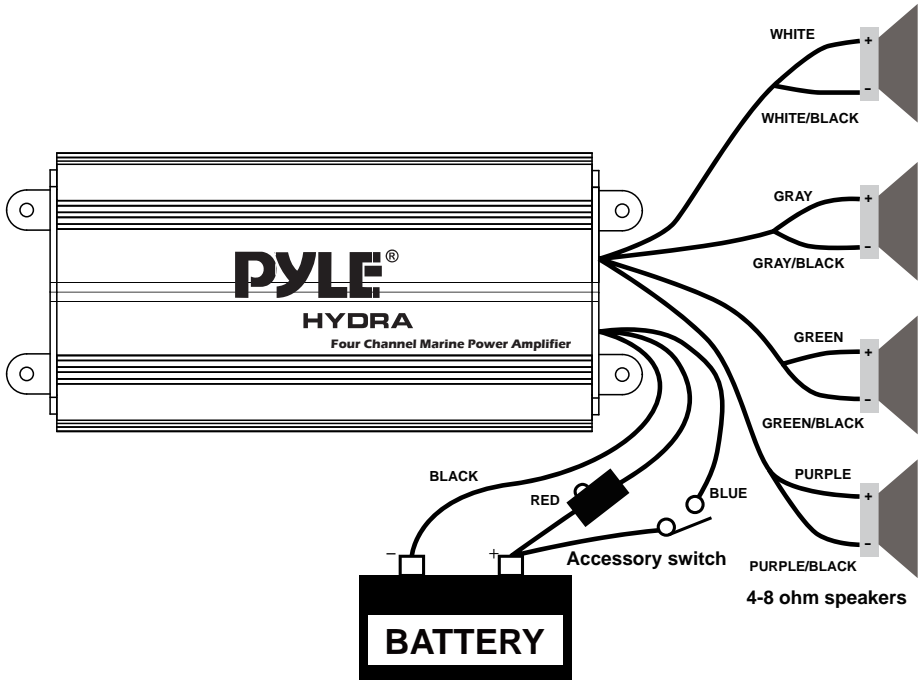

WIRE COLOR

Red
 Black
 Blue
 White
 White/Black
 Gray
 Gray/Black
 Green
 Green/Black
 Purple
 Purple/Black

DESCRIPTION

Battery (+), 12dc
 Battery (-), Ground
 Remote Turn On, 12vdc = ON
 CH1 (+)
 CH1 (-)
 CH2 (+)
 CH2 (-)
 CH3 (+)
 CH3 (-)
 CH4 (+)
 CH4 (-)

PYLE

PyleUSA.com



VISIT US ONLINE:

Have a question?

Need service or repair?

Want to leave a comment?

PyleUSA.com/ContactUs

PYLE